





Code :- WC/UB – 901 CRANK TYPE









- Code :- WC/UB 901 CRANK TYPE
- **Specifications:-**
- Available In 8 Feet and 10 feet Dia
- Center pole made of polished aluminum, duly lacquered
- •Fitted with leather pockets on the edges
- Crank is made of pressure die casted Zinc components



Code :- WC/UB – 902 ROPE PULLEY TYPE





- Code :- WC/UB 902 ROPE AND PULLEY TYPE
- **Specifications:-**
- Available In 8 Feet and 10 feet Dia
- Center pole made of polished aluminum , duly lacquered
- •Fitted with leather pockets on the edges
- Crank is made of pressure die casted Zinc components



studio^{.sg}

Rope Pulley System





studio^{.sg}

Code :- WC/UB – 903 (Round) CRANK TYPE

Code :- WC/UB – 903 CRANK TYPE







CRANK TYPE

Code :- WC/UB – 903 (Square)









- Code :- WC/UB 903 BEVELLED CRANK TYPE
- **Specifications:-**
- Available In Round and Square in various Sizes
- Available in single, two and three tier options
- Center pole made of SS 304 brushed finish
- Suitable for high wind conditions




- Code :- WC/UB 904 ROPE AND PULLEY TYPE
- **Specifications:-**
- Available In Round and Square in various Sizes
- Available in single, two and three tier options
- Center pole made of SS 304 brushed finish
- Suitable for high wind conditions



Code :- WC/UB – 905 Cantilevered CRANK TYPE

studio^{.sg}

studio^{.sg}

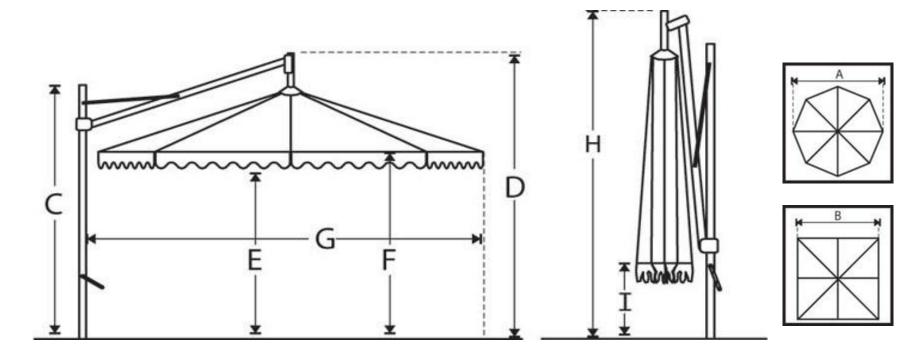

Model	А	В	С	D	E	F	G	Н	I
OCT 3.6m	3600		2700	3230	1920	2060	3750	2930	710
OCT 4m	4000		2840	3450	2160	2240	4150	3250	760
OCT 4.5m	4500		2840	3570	2100	2240	4400	3400	700
SQ 3.2m		3200	2840	3370	2020	2160	3630	3060	390
SQ 3.6m		3600	2840	3450	2100	2240	3950	3250	250



- Code :- WC/UB 905 Cantilevered Crank type
- **Specifications:-**
- •Made out of Structural Aluminum with SS fittings.
- Wind up operation
- Available in Square and Octagonal shape
- Hot Galvanized Base which rotates at 360 degree and tilts to post.
- •With Dickson Fabric (100% solution dyed Acrylic Fabric) & polyester fabric
- The Valances can be straight or Scalloped
- Protective cover also Available





- 450mm X 450 mm X 40mm thick Base 25kg
- 500 mm X 500 mm X 80 mm thick Base 50 kg







- Available in various weights:-
- 450mm X 450 mm X 40mm thick Base 25kg
- 500 mm X 500 mm X 80 mm thick Base 50 kg